


HINGE ASSEMBLY WITH 1/2 in. STAINLESS BOLTS AND TOP-LOCK NUTS

1/4 x 2 in. FLAT STOCK FOR REAR VERTICAL PLATES AND HINGE PLATE

ALUMINUM SQUARE BAR. 3/4 x 3/4 in. FOR ROUND BAR DIAMETER LESS THAN 3/4 in. OR 1 x 1 in. FOR 3/4 in. ROUND BARS.

ALUMINUM ROUND BARS

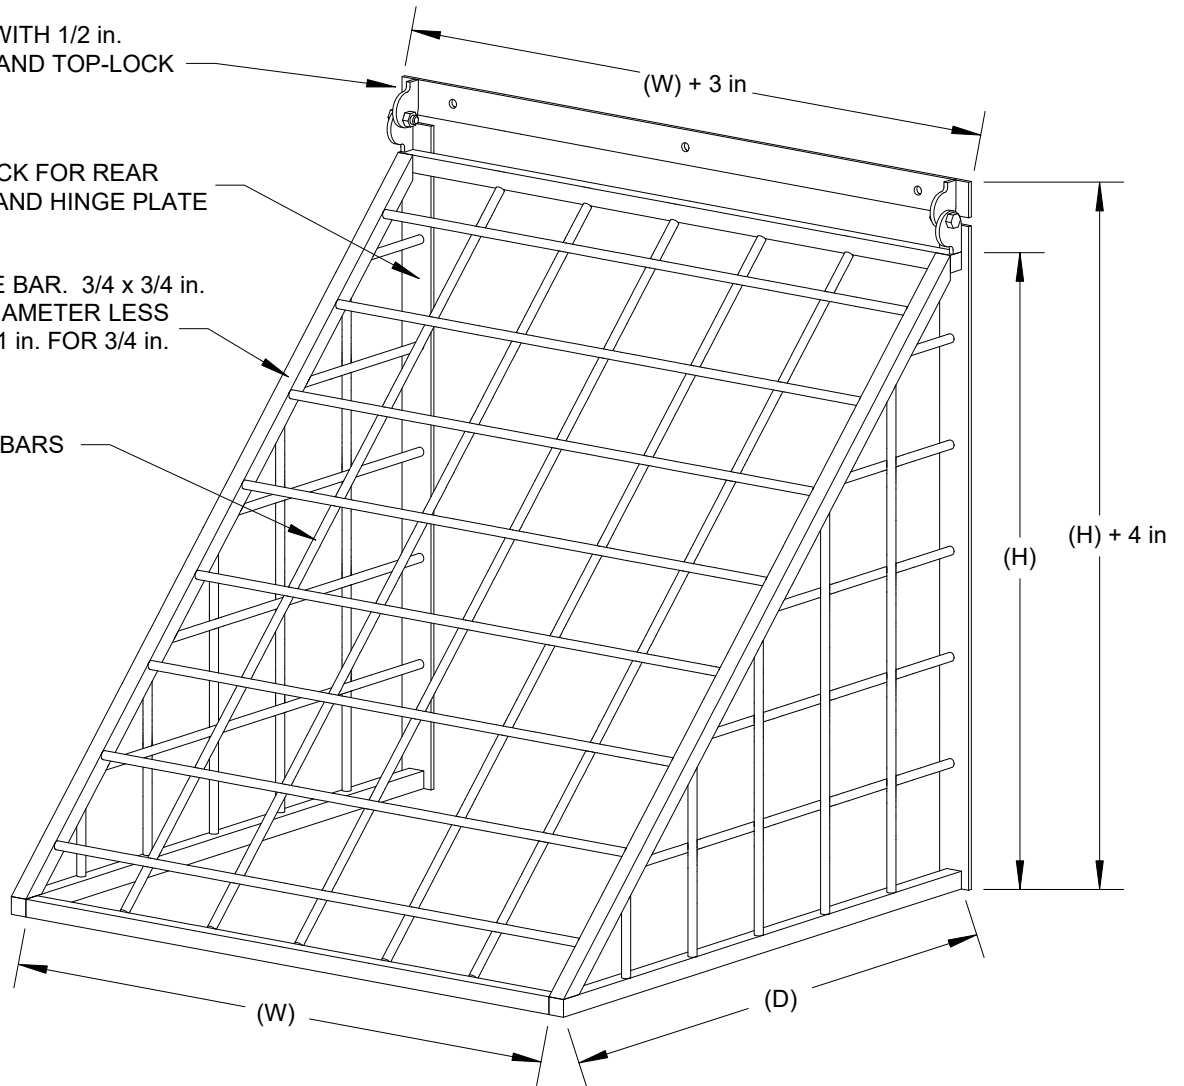

NOTES:

1. ALL MATERIALS TO BE ALUMINUM 6061-T6 ALLOY.
2. WELD ALL INTERSECTIONS.
3. FASTEN TO CONCRETE STRUCTURE WITH 3/8 in. x 3 in. STAINLESS STEEL CONCRETE WEDGE ANCHORS AT 18 in. MAX. SPACING. MINIMUM OF (2).
4. RACK HAS OPEN BOTTOM AND IS DESIGNED TO REST ON CONCRETE CHANNEL, APRON, OR BASIN BOTTOM.
5. IT IS RECOMMENDED, BUT NOT REQUIRED, THAT THE HEIGHT (H) AND DEPTH (D) ARE THE SAME. THIS IS THE STRONGEST CONFIGURATION AS THE FRONT WILL BE AT A 45 DEGREE ANGLE.
7. OPTIONAL - 10g STAINLESS STEEL WIRE MESH WITH 1 in. GRID TO COVER RACK.
8. HINGE ASSEMBLY IS STANDARD, BUT MAY BE ELIMINATED.

TRASH RACK INFORMATION

RACK WIDTH I.D. (W)	
RACK HEIGHT I.D. (H)	
RACK DEPTH O.D. (D)	
BAR DIAMETER	
BAR CENTERLINE SPACING	
FASTENERS (QTY)	
HINGES REQUIRED?	
WIRE MESH?	
NOTES:	

This CAD file and drawing is the property of Effluent Design & Fabrication, LLC. It is intended for the named recipient. Unauthorized reproduction, disclosure, or distribution is strictly prohibited.



Effluent
Design & Fabrication, LLC
www.effluentdesignfab.com

6 William Martin Way
Flemington, NJ 08822

Phone: 908.458.9220
FAX: 908.458.9930

PROJECT:
ALUMINUM WEDGE SERIES AW RACK

FILE #:

DATE:

SCALE:

DRAWN BY: